

# Produkt familie datablad

## OSRAM DULUX L LUMILUX

CFLni, med 4-pin 2G11 sokkel til ECG/CCG drift



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

### Product features

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Dimmable (1...100 % with QUICKTRONIC QT<sub>i</sub> DALI/DIM)
- Color rendering index  $R_a \geq 80$
- Average life: 20,000 h (with QUICKTRONIC)
- Operates on battery, solar and AC power with suitable electronic control gear
- Also available in blue



## Produkt familie datablad

---

### Product benefits

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

---

### Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

---

### Equipment / Accessories

- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

## Produkt familie datablad

### Teknisk data

Produkt beskrivelse	Elektriske data		Photometrical data			
	ZLDV_Nominal wattage [AGGR]	ZLDV_Rated wattage [AGGR]	ZLDV_Nominal luminous flux [AGGR]	ZLDV_Light color (designation) [AGGR]	ZLDV_Luminous flux at 25 °C [AGGR]	ZLDV_Rated luminous flux [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	18.00 W	18.00 W	1200 lm	LUMILUX INTERNA	1200 lm	1200 lm
DULUX L 18 W/830 2G11 <sup>1)</sup>	18.00 W	18.00 W	1200 lm	LUMILUX Warm White	1200 lm	1200 lm
DULUX L 18 W/840 2G11 <sup>1)</sup>	18.00 W	18.00 W	1200 lm	LUMILUX Cool White	1200 lm	1200 lm
DULUX L 24 W/827 2G11 <sup>1)</sup>	24.00 W	24.00 W	1800 lm	LUMILUX INTERNA	1800 lm	1800 lm
DULUX L 24 W/830 2G11 <sup>1)</sup>	24.00 W	24.00 W	1800 lm	LUMILUX Warm White	1800 lm	1800 lm
DULUX L 24 W/840 2G11 <sup>1)</sup>	24.00 W	24.00 W	1800 lm	LUMILUX Cool White	1800 lm	1800 lm
DULUX L 36 W/827 2G11 <sup>1)</sup>	36.00 W	36.00 W	2900 lm	LUMILUX INTERNA	2900 lm	2900 lm
DULUX L 36 W/830 2G11 <sup>1)</sup>	36.00 W	36.00 W	2900 lm	LUMILUX Warm White	2900 lm	2900 lm
DULUX L 36 W/835 2G11 <sup>1)</sup>	36.00 W	36.00 W	2900 lm	LUMILUX White	2900 lm	2900 lm
DULUX L 36 W/840 2G11 <sup>1)</sup>	36.00 W	36.00 W	2900 lm	LUMILUX Cool White	2900 lm	2900 lm
DULUX L 36 W/865 2G11 <sup>1)</sup>	36.00 W	36.00 W	2755 lm		2750 lm	2755 lm
DULUX L 40 W/830 2G11 <sup>2)</sup>	40.00 W	40.00 W	3500 lm	LUMILUX Warm White	3500 lm	3500 lm
DULUX L 40 W/840 2G11 <sup>2)</sup>	40.00 W	40.00 W	3500 lm	LUMILUX Cool White	3500 lm	3500 lm
DULUX L 55 W/827 2G11 <sup>2)</sup>	55.00 W	55.00 W	4800 lm	LUMILUX INTERNA	4800 lm	4800 lm
DULUX L 55 W/830 2G11 <sup>2)</sup>	55.00 W	55.00 W	4800 lm	LUMILUX Warm White	4800 lm	4800 lm
DULUX L 55 W/840 2G11 <sup>2)</sup>	55.00 W	55.00 W	4800 lm	LUMILUX Cool White	4800 lm	4800 lm
DULUX L 55 W/865 2G11 <sup>2)</sup>	55.00 W	55.00 W	4550 lm	LUMILUX Cool Daylight	4550 lm	4560 lm
DULUX L 80 W/830 2G11 <sup>2)</sup>	80.00 W	80.00 W	6000 lm	LUMILUX Warm White	6500 lm	6000 lm
DULUX L 80 W/840 2G11 <sup>2)</sup>	80.00 W	80.00 W	6000 lm	LUMILUX Cool White	6500 lm	6000 lm

Produkt beskrivelse	ZLDV_Rated color temperature [AGGR]	ZLDV_Rated LLMF at 4,000 h [AGGR]	ZLDV_Rated LLMF at 6,000 h [AGGR]	ZLDV_Rated LLMF at 8,000 h [AGGR]	ZLDV_Rated LLMF at 12,000 h [AGGR]	ZLDV_Rated LLMF at 16,000 h [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	2700 K	0.90	0.88	0.85	0.84	0.81
DULUX L 18 W/830 2G11 <sup>1)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Rated color temperature [AGGR]	ZLDV_Rated LLMF at 4,000 h [AGGR]	ZLDV_Rated LLMF at 6,000 h [AGGR]	ZLDV_Rated LLMF at 8,000 h [AGGR]	ZLDV_Rated LLMF at 12,000 h [AGGR]	ZLDV_Rated LLMF at 16,000 h [AGGR]
DULUX L 18 W/840 2G11 <sup>1)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 24 W/827 2G11 <sup>1)</sup>	2700 K	0.90	0.88	0.85	0.84	0.81
DULUX L 24 W/830 2G11 <sup>1)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 24 W/840 2G11 <sup>1)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 36 W/827 2G11 <sup>1)</sup>	2700 K	0.90	0.88	0.85	0.84	0.81
DULUX L 36 W/830 2G11 <sup>1)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 36 W/835 2G11 <sup>1)</sup>	3500 K	0.90	0.88	0.85	0.84	0.81
DULUX L 36 W/840 2G11 <sup>1)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 36 W/865 2G11 <sup>1)</sup>	6500 K	0.81	0.79	0.77	0.76	0.73
DULUX L 40 W/830 2G11 <sup>2)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 40 W/840 2G11 <sup>2)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 55 W/827 2G11 <sup>2)</sup>	2700 K	0.90	0.88	0.85	0.84	0.81
DULUX L 55 W/830 2G11 <sup>2)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 55 W/840 2G11 <sup>2)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 55 W/865 2G11 <sup>2)</sup>	6500 K	0.81	0.79	0.77	0.76	0.73
DULUX L 80 W/830 2G11 <sup>2)</sup>	3000 K	0.90	0.88	0.85	0.84	0.81
DULUX L 80 W/840 2G11 <sup>2)</sup>	4000 K	0.90	0.88	0.85	0.84	0.81

Produkt beskrivelse	ZLDV_Rated LLMF at 20,000 h [AGGR]	ZLDV_Luminance [AGGR]	Fargegjen- givelsesin- deks Ra	Mål og vekt			
				ZLDV_Diameter [AGGR]	ZLDV_Overall length [AGGR]	ZLDV_Tube diameter [AGGR]	ZLDV_L ength [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	214.5 mm	17.5 mm	217.0 mm
DULUX L 18 W/830 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	214.5 mm	17.5 mm	217.0 mm
DULUX L 18 W/840 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	214.5 mm	17.5 mm	217.0 mm

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Rated LLMF at 20,000 h [AGGR]	ZLDV_Luminance [AGGR]	Fargegjengivelsesindeks Ra	Mål og vekt			
				ZLDV_Diameter [AGGR]	ZLDV_Overall length [AGGR]	ZLDV_Tube diameter [AGGR]	ZLDV_L ength [AGGR]
DULUX L 24 W/827 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	314.5 mm	17.5 mm	317.0 mm
DULUX L 24 W/830 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	314.5 mm	17.5 mm	317.0 mm
DULUX L 24 W/840 2G11 <sup>1)</sup>	0.80	2.1 cd/cm <sup>2</sup>	80...89	17.5 mm	314.5 mm	17.5 mm	317.0 mm
DULUX L 36 W/827 2G11 <sup>1)</sup>	0.80	2.8 cd/cm <sup>2</sup>	80...89	17.5 mm	408.5 mm	17.5 mm	411.0 mm
DULUX L 36 W/830 2G11 <sup>1)</sup>	0.80	2.8 cd/cm <sup>2</sup>	80...89	17.5 mm	408.5 mm	17.5 mm	411.0 mm
DULUX L 36 W/835 2G11 <sup>1)</sup>	0.80	2.8 cd/cm <sup>2</sup>	80...89	16.0 mm	408.5 mm	17.5 mm	411.0 mm
DULUX L 36 W/840 2G11 <sup>1)</sup>	0.80	2.8 cd/cm <sup>2</sup>	80...89	17.5 mm	408.5 mm	17.5 mm	411.0 mm
DULUX L 36 W/865 2G11 <sup>1)</sup>	0.72	2.8 cd/cm <sup>2</sup>	80...89	17.5 mm	408.5 mm	17.5 mm	411.0 mm
DULUX L 40 W/830 2G11 <sup>2)</sup>	0.80	2.3 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm
DULUX L 40 W/840 2G11 <sup>2)</sup>	0.80	2.3 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm
DULUX L 55 W/827 2G11 <sup>2)</sup>	0.80	3.2 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm
DULUX L 55 W/830 2G11 <sup>2)</sup>	0.80	3.2 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm
DULUX L 55 W/840 2G11 <sup>2)</sup>	0.80	3.2 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm
DULUX L 55 W/865 2G11 <sup>2)</sup>	0.72	3.2 cd/cm <sup>2</sup>	80...89	17.5 mm	530.5 mm	17.5 mm	533.0 mm

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Rated LLMF at 20,000 h [AGGR]	ZLDV_Luminance [AGGR]	Fargegjen- givelsesin deks Ra	Mål og vekt			
				ZLDV_Diameter [AGGR]	ZLDV_Overall length [AGGR]	ZLDV_Tube diameter [AGGR]	ZLDV_L ength [AGGR]
DULUX L 80 W/830 2G11 <sup>2)</sup>	0.80	3.7 cd/cm <sup>2</sup>	80...89	17.5 mm	562.5 mm	17.5 mm	565.0 mm
DULUX L 80 W/840 2G11 <sup>2)</sup>	0.80	3.7 cd/cm <sup>2</sup>	80...89	17.5 mm	562.5 mm	17.5 mm	565.0 mm

Produkt beskrivelse	ZLDV_Length acc. to IEC standard [AGGR]	ZLDV_Length with base excl. base pins/connection [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Maximum diameter [AGGR]	Temperatures & operating conditions	Levetid
					ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	ZLDV_Rated lamp life time [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	225 mm	217.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 18 W/830 2G11 <sup>1)</sup>	225 mm	217.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 18 W/840 2G11 <sup>1)</sup>	225 mm	217.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 24 W/827 2G11 <sup>1)</sup>	320 mm	317.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 24 W/830 2G11 <sup>1)</sup>	320 mm	317.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 24 W/840 2G11 <sup>1)</sup>	320 mm	317.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 36 W/827 2G11 <sup>1)</sup>	415 mm	411.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 36 W/830 2G11 <sup>1)</sup>	415 mm	411.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 36 W/835 2G11 <sup>1)</sup>	415 mm	411.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 36 W/840 2G11 <sup>1)</sup>	415 mm	411.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 36 W/865 2G11 <sup>1)</sup>	415 mm	411.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 40 W/830 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 40 W/840 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 55 W/827 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 55 W/830 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 55 W/840 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h
DULUX L 55 W/865 2G11 <sup>2)</sup>	535 mm	533.00 mm	T17,5	17.0 mm	25.0 °C	20000 h

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Length acc. to IEC standard [AGGR]	ZLDV_Length with base excl. base pins/connection [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Maximum diameter [AGGR]	Temperatures & operating conditions	Levetid
					ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	ZLDV_Rated lamp life time [AGGR]
DULUX L 80 W/830 2G11 <sup>2)</sup>	565 mm	565.00 mm	T16	17.0 mm	25.0 °C	20000 h
DULUX L 80 W/840 2G11 <sup>2)</sup>	565 mm	565.00 mm	T16	17.0 mm	25.0 °C	20000 h

Produkt beskrivelse	ZLDV_Service life [AGGR]	ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	ZLDV_Rated lamp survival factor at 6,000 h [AGGR]	ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	ZLDV_Rated lamp survival factor at 12,000 h [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 18 W/830 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 18 W/840 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 24 W/827 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 24 W/830 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 24 W/840 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 36 W/827 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 36 W/830 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 36 W/835 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 36 W/840 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 36 W/865 2G11 <sup>1)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 40 W/830 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 40 W/840 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 55 W/827 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 55 W/830 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 55 W/840 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 55 W/865 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 80 W/830 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95
DULUX L 80 W/840 2G11 <sup>2)</sup>	13000 h <sup>3)</sup>	0.99	0.99	0.99	0.99	0.95

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	ZLDV_Operation mode LLMF/LSF [AGGR]	Nominell levetid på lampen	ZLDV_Lifespan [AGGR]	Ytterligere produktdata
						ZLDV_Base (standard designation) [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 18 W/830 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 18 W/840 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 24 W/827 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 24 W/830 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 24 W/840 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 36 W/827 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 36 W/830 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 36 W/835 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 36 W/840 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 36 W/865 2G11 <sup>1)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 40 W/830 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 40 W/840 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 55 W/827 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 55 W/830 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 55 W/840 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 55 W/865 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 80 W/830 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11
DULUX L 80 W/840 2G11 <sup>2)</sup>	0.81	0.50	HF	20000 h	20000 h <sup>3)</sup>	2G11

Produkt beskrivelse	ZLDV_Mercury content [AGGR]	Appropriate disposal acc. to WEEE	ZLDV_Product remark [AGGR]	Egenskaper		Sertifikater og standarder
				ZLDV_Dimmable [AGGR]	ZLDV_Suitable for indoor [AGGR]	ZLDV_Energy efficiency class [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 18 W/830 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A



## Produkt familie datablad

Produkt beskrivelse	ZLDV_Mercury content [AGGR]	Appropriate disposal acc. to WEEE	ZLDV_Product remark [AGGR]	Egenskaper		Sertifikater og standarder
				ZLDV_Dimmable [AGGR]	ZLDV_Suitable for indoor [AGGR]	ZLDV_Energy efficiency class [AGGR]
DULUX L 18 W/840 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 24 W/827 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 24 W/830 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 24 W/840 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 36 W/827 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 36 W/830 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 36 W/835 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 36 W/840 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 36 W/865 2G11 <sup>1)</sup>	2.3 mg	Ja	For ECG and CCG operation	Yes	Yes	A
DULUX L 40 W/830 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A+
DULUX L 40 W/840 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A+
DULUX L 55 W/827 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A+
DULUX L 55 W/830 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A+
DULUX L 55 W/840 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A+
DULUX L 55 W/865 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A
DULUX L 80 W/830 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A
DULUX L 80 W/840 2G11 <sup>2)</sup>	2.5 mg	Ja	For ECG operation only	Yes	Yes	A

## Produkt familie datablad

Produkt beskrivelse	ZLDV_Energy consumption [AGGR]	Landsspesifikke kategoriseringer
		ZLDV_ILCOS [AGGR]
DULUX L 18 W/827 2G11 <sup>1)</sup>	20 kWh/1000h	FSD-18/827-E-2G11-43,9/217
DULUX L 18 W/830 2G11 <sup>1)</sup>	20 kWh/1000h	FSD-18/830-E-2G11-43,9/217
DULUX L 18 W/840 2G11 <sup>1)</sup>	20 kWh/1000h	FSD-18/840-E-2G11-43,9/217
DULUX L 24 W/827 2G11 <sup>1)</sup>	27 kWh/1000h	FSD-24/827-E-2G11-43,9/317
DULUX L 24 W/830 2G11 <sup>1)</sup>	27 kWh/1000h	FSD-24/830-E-2G11-43,9/317
DULUX L 24 W/840 2G11 <sup>1)</sup>	27 kWh/1000h	FSD-24/840-E-2G11-43,9/317
DULUX L 36 W/827 2G11 <sup>1)</sup>	40 kWh/1000h	FSD-36/827-E-2G11-43,9/411
DULUX L 36 W/830 2G11 <sup>1)</sup>	40 kWh/1000h	FSD-36/830-E-2G11-43,9/411
DULUX L 36 W/835 2G11 <sup>1)</sup>	40 kWh/1000h	FSD-36/835-E-2G11-43,9/411
DULUX L 36 W/840 2G11 <sup>1)</sup>	40 kWh/1000h	FSD-36/840-E-2G11-43,9/411
DULUX L 36 W/865 2G11 <sup>1)</sup>	40 kWh/1000h	FSD-36/865-E-2G11-43,9/411
DULUX L 40 W/830 2G11 <sup>2)</sup>	44 kWh/1000h	FSDH-40/830-/P/-2G11-43,9/533
DULUX L 40 W/840 2G11 <sup>2)</sup>	44 kWh/1000h	FSDH-40/840-/P/-2G11-43,9/533
DULUX L 55 W/827 2G11 <sup>2)</sup>	61 kWh/1000h	FSDH-55/827-/P/-2G11-43,9/533

## Produkt familie datablad





Produkt beskrivelse	ZLDV_Energy consumption [AGGR]	Landsspesifikke kategoriseringer
		ZLDV_ILCOS [AGGR]
DULUX L 55 W/830 2G11 <sup>2)</sup>	61 kWh/1000h	FSDH-55/830-/P/-2G11-43,9/533
DULUX L 55 W/840 2G11 <sup>2)</sup>	61 kWh/1000h	FSDH-55/840-/P/-2G11-43,9/533
DULUX L 55 W/865 2G11 <sup>2)</sup>	61 kWh/1000h	FSDH-55/865-/P/-2G11-43,9/533
DULUX L 80 W/830 2G11 <sup>2)</sup>	88 kWh/1000h	FSDH-80/830-/P/-2G11-43,9/565
DULUX L 80 W/840 2G11 <sup>2)</sup>	88 kWh/1000h	FSDH-80/840-/P/-2G11-43,9/565

<sup>1)</sup> For elektronisk- og konvensjonell drift

<sup>2)</sup> Kun for ECG drift

<sup>3)</sup> With preheat ECG

## Produkt familie datablad

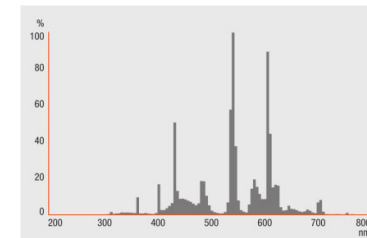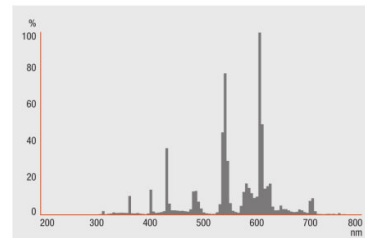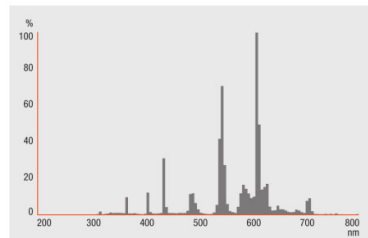


DULUX L 18 W/827 2G11, DULUX L 18 W/830 2G11, DULUX L 18 W/840 2G11, DULUX L 24 W/827 2G11, DULUX L 24 W/830 2G11, DULUX L 24 W/840 2G11, DULUX L 36 W/827 2G11, DULUX L 36 W/830 2G11, DULUX L 36 W/835 2G11, DULUX L 36 W/840 2G11, DULUX L 36 W/865 2G11, DULUX L 40 W/830 2G11, DULUX L 40 W/840 2G11, DULUX L 55 W/827 2G11, DULUX L 55 W/830 2G11, DULUX L 55 W/840 2G11, DULUX L 55 W/865 2G11, DULUX L 80 W/830 2G11, DULUX L 80 W/840 2G11

DULUX L 18 W/827 2G11, DULUX L 24 W/827 2G11

DULUX L 18 W/830 2G11, DULUX L 24 W/830 2G11, DULUX L 80 W/830 2G11

DULUX L 18 W/840 2G11, DULUX L 24 W/840 2G11, DULUX L 80 W/840 2G11

## Produkt familie datablad

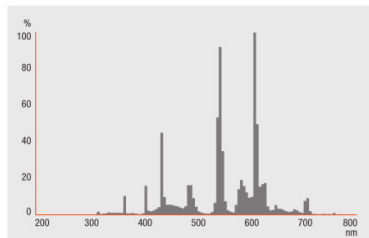

---

DULUX L 36 W/835 2G11

---

### Utstyr/tilbehør

- Passer for konvensjonelle forkoplinger og startere
- Passende for drift med elektroniske og konvensjonelle forkoblinger

---

### System hjelp

For mer detaljert program informasjon og grafikk se produktets dataark.

---

### Logistikk data

## Produkt familie datablad

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
4050300010748	DULUX L 18 W/827 2G11	NO: VS 10	260 mm x 103 mm x 136 mm	3.64 dm <sup>3</sup>	795.20 g
4050300010731	DULUX L 18 W/830 2G11	NO: VS 10	260 mm x 103 mm x 136 mm	3.64 dm <sup>3</sup>	791.75 g
4050300010724	DULUX L 18 W/840 2G11	NO: VS 10	260 mm x 103 mm x 136 mm	3.64 dm <sup>3</sup>	903.00 g
4050300010779	DULUX L 24 W/827 2G11	NO: VS 10	361 mm x 103 mm x 136 mm	5.06 dm <sup>3</sup>	1076.50 g
4050300010762	DULUX L 24 W/830 2G11	NO: VS 10	361 mm x 103 mm x 136 mm	5.06 dm <sup>3</sup>	1093.75 g
4050300010755	DULUX L 24 W/840 2G11	NO: VS 10	361 mm x 103 mm x 136 mm	5.06 dm <sup>3</sup>	1099.00 g
4050300010809	DULUX L 36 W/827 2G11	NO: VS 10	455 mm x 131 mm x 116 mm	6.91 dm <sup>3</sup>	1351.50 g
4050300010793	DULUX L 36 W/830 2G11	NO: VS 10	455 mm x 103 mm x 136 mm	6.37 dm <sup>3</sup>	1369.00 g
4050300295930	DULUX L 36 W/835 2G11	NO: VS 10	455 mm x 118 mm x 136 mm	7.30 dm <sup>3</sup>	1355.40 g
4050300010786	DULUX L 36 W/840 2G11	NO: VS 10	455 mm x 119 mm x 136 mm	7.36 dm <sup>3</sup>	1410.00 g
4050300328263	DULUX L 36 W/865 2G11	NO: VS 10	455 mm x 103 mm x 136 mm	6.37 dm <sup>3</sup>	1357.50 g
4050300298894	DULUX L 40 W/830 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g
4050300279909	DULUX L 40 W/840 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g
4050300315881	DULUX L 55 W/827 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g

## Produkt familie datablad

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
4050300298917	DULUX L 55 W/830 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g
4050300295879	DULUX L 55 W/840 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g
4050300553900	DULUX L 55 W/865 2G11	NO: VS 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	2173.00 g
4050300665467	DULUX L 80 W/830 2G11	NO: VS 10	140 mm x 107 mm x 617 mm	9.24 dm <sup>3</sup>	1810.00 g
4050300665481	DULUX L 80 W/840 2G11	NO: VS 10	140 mm x 107 mm x 617 mm	9.24 dm <sup>3</sup>	1810.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Referanser / Lenker

For mer informasjon om QUICKTRONIC elektronisk forkobling gå til

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

For mer informasjon om systemgarantien samt vilkårene og betingelsene i garantien besøk

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

---

### Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.

OSRAM GMBH is distribution partner  
of LEDVANCE for Digital Lighting  
Systems and Components

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany