

Produkt datablad

DULUX L 40 W/865 2G11

OSRAM DULUX L LUMILUX | CFLni, med 4-pin 2G11 sokkel til ECG/CCG drift



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

Product features

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Dimmable (1...100 % with QUICKTRONIC QT_i DALI/DIM)
- Color rendering index $R_a \geq 80$
- Average life: 20,000 h (with QUICKTRONIC)
- Operates on battery, solar and AC power with suitable electronic control gear
- Also available in blue



Produkt datablad

Product benefits

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Equipment / Accessories

- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

Produkt datablad

Teknisk data


Elektriske data

ZLDV_Nominal wattage [AGGR]	40.00 W
ZLDV_Rated wattage [AGGR]	40.00 W

Photometrical data

ZLDV_Nominal luminous flux [AGGR]	3325 lm
ZLDV_Light color (designation) [AGGR]	LUMILUX Cool Daylight
ZLDV_Luminous flux at 25 °C [AGGR]	3325 lm
ZLDV_Rated luminous flux [AGGR]	3325 lm
ZLDV_Rated color temperature [AGGR]	6500 K
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.81
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.79
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.77
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.76
ZLDV_Rated LLMF at 16,000 h [AGGR]	0.73
ZLDV_Rated LLMF at 20,000 h [AGGR]	0.72
ZLDV_Luminance [AGGR]	2.3 cd/cm ²
Fargegjengivelsesindeks Ra	80...89

Mål og vekt

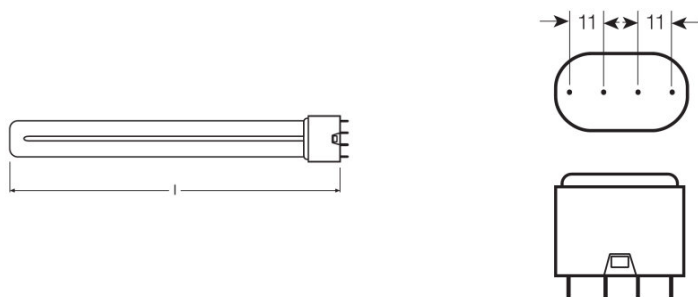

ZLDV_Diameter [AGGR]	17.5 mm
ZLDV_Overall length [AGGR]	530.5 mm
ZLDV_Tube diameter [AGGR]	17.5 mm
ZLDV_Length [AGGR]	533.0 mm
ZLDV_Length acc. to IEC standard [AGGR]	535 mm
ZLDV_Length with base excl. base pins/connection [AGGR]	533.00 mm

Produkt datablad

ZLDV_Outer bulb [AGGR]	T17,5
ZLDV_Maximum diameter [AGGR]	17.0 mm

Temperatures & operating conditions

ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	25.0 °C
--	---------

Levetid

ZLDV_Rated lamp life time [AGGR]	20000 h
ZLDV_Service life [AGGR]	13000 h ¹⁾
ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 6,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 12,000 h [AGGR]	0.95
ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	0.81
ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	0.50
ZLDV_Operation mode LLMF/LSF [AGGR]	HF
ZLDV_Lifespan [AGGR]	20000 h ¹⁾
Nominell levetid på lampen	20000 h

¹⁾ With preheat ECG

Ytterligere produktdata

ZLDV_Base (standard designation) [AGGR]	2G11
ZLDV_Mercury content [AGGR]	2.5 mg
Appropriate disposal acc. to WEEE	Ja
ZLDV_Product remark [AGGR]	For ECG operation only

Egenskaper

ZLDV_Dimmable [AGGR]	Yes
ZLDV_Suitable for indoor [AGGR]	Yes

Sertifikater og standarder

ZLDV_Energy efficiency class [AGGR]	A
ZLDV_Energy consumption [AGGR]	44 kWh/1000h


Landsspesifikke kategoriseringer

ZLDV_ILCOS [AGGR]	FSDH-40/865-/P/-2G11-43,9/533
-------------------	-------------------------------


Produkt datablad

Utstyr/tilbehør

- Passer for konvensjonelle forkoplinger og startere
- Passende for drift med elektroniske og konvensjonelle forkoblinger



Circuit diagram



Circuit diagram

Referanser / Lenker

For mer informasjon om QUICKTRONIC elektronisk forkobling gå til

- ▶ www.osram.com/QUICKTRONIC

For mer informasjon om systemgarantien samt vilkårene og betingelsene i garantien besøk

- ▶ www.osram.com/system-guarantee

Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.

OSRAM GMBH is distribution partner
of LEDVANCE for Digital Lighting
Systems and Components

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX L 40 W/865 2G11

OSRAM DULUX L LUMILUX | CFLni, med 4-pin 2G11 sokkel til ECG/CCG drift

Produktnavn	Produktnavn ECG	EAN	Nominal wattage + Power loss	Nominell strøm	Lysstrøm ved 35 ° C	Antall belysningsutganger
DULUX L 40 W/865 2G11	QTi 1x14/24/21/39 GII	4008321383334	44.00 W	0.19 A	3500 lm	1
	QTi 1x21/39 DIM	4050300870564	41.80 W	0.18 A	3500 lm	1
	QTi 2x14/24/21/39 GII	4008321383396	86.00 W	0.37 A	3500 lm	2
	QTi 2x21/39 DIM	4050300870694	82.00 W	0.36 A	3500 lm	2
	QTi DALI 1x21/39 DIM	4050300870366	41.80 W	0.18 A	3500 lm	1
	QTi DALI 2x21/39 DIM	4050300870489	82.00 W	0.36 A	3500 lm	2
	QTi DALI-T/E 1x18-57 DIM	4008321060808	45.00 W	0.20 A	3500 lm	1
	QTi DALI-T/E 2x18-42 DIM	4008321060822	87.00 W	0.38 A	3500 lm	2
	QTP-DL 2x36-40	4008321117922	90.00 W	0.21 A	3650 lm	2
	QTP-M 1x26-42	4008321329134	43.00 W	0.19 A	3500 lm	1
	QTP-OPTIMAL 1x18-40	4008321873743	44.00 W	0.20 A	3500 lm	1
	QTP-OPTIMAL 2x18-40	4008321873767	88.00 W	0.37 A	3500 lm	2