

Produkt datablad

HE 21 W/840

LUMILUX T5 HE | Tubular fluorescent lamps 16 mm, high efficiency, with G5 base



- Public buildings
- Offices
- Shops
- Supermarkets and department stores
- Industry
- Outdoor applications only in suitable luminaires

- Good economy and efficiency
- Up to 20 % more economical than LUMILUX T8
- Up to 50 % smaller volume than comparable T8 lamps

Product features

- Luminous efficacy: up to 104 lm/W
- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Long average lifetime: up to 24,000 h (with QUICKTRONIC ECG)
- Good color rendering group: 1B (R_a : 80...89)
- Dimmable

Product benefits

- Good economy and efficiency
- Up to 20 % more economical than LUMILUX T8
- Up to 50 % smaller volume than comparable T8 lamps



Produkt datablad

Areas of application

- Public buildings
- Offices
- Shops
- Supermarkets and department stores
- Industry
- Outdoor applications only in suitable luminaires

Produkt datablad

Teknisk data


Elektriske data

ZLDV_Nominal voltage [AGGR]	220 V
ZLDV_Nominal wattage [AGGR]	21.00 W
ZLDV_Rated lamp efficacy (HF data 25 °C) [AGGR]	92 lm/W
ZLDV_Rated wattage [AGGR]	20.60 W

Photometrical data

ZLDV_Color rendering index Ra [AGGR]	≥80
ZLDV_Rated luminous flux [AGGR]	1900 lm
ZLDV_Luminous flux at 25 °C [AGGR]	1900 lm
ZLDV_Luminous flux at 35 °C [AGGR]	2100 lm
ZLDV_Light color [AGGR]	840
ZLDV_Rated color temperature [AGGR]	4000 K
ZLDV_Nominal luminous flux [AGGR]	1900 lm
ZLDV_Light color (designation) [AGGR]	LUMILUX Cool White
ZLDV_Rated LLMF at 2,000 h [AGGR]	0.95
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.92
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.90
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.90
ZLDV_Rated LLMF at 16,000 h [AGGR]	0.90
ZLDV_Rated LLMF at 20,000 h [AGGR]	0.89

Mål og vekt

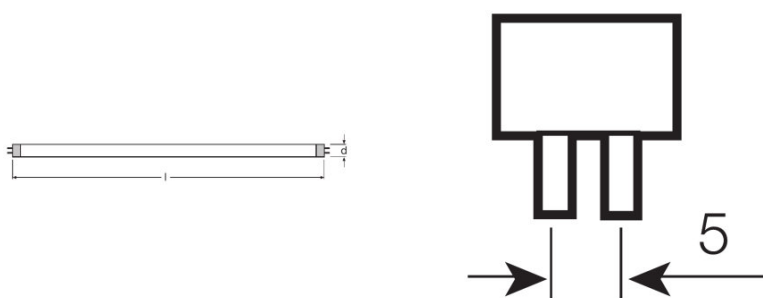

ZLDV_Tube diameter [AGGR]	16 mm
ZLDV_Length [AGGR]	849.0 mm

Produkt datablad

ZLDV_Length with base excl. base pins/connection [AGGR]	849.00 mm
ZLDV_Diameter [AGGR]	16.0 mm
ZLDV_Maximum diameter [AGGR]	16.0 mm

Temperatures & operating conditions

ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	35.0 °C
--	---------

Levetid

ZLDV_Service life [AGGR]	19000 h ¹⁾
ZLDV_Lifespan [AGGR]	24000 h ¹⁾
ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 6,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 12,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	0.97
ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	0.85
ZLDV_Operation mode LLMF/LSF [AGGR]	HF
ZLDV_Rated lamp life time [AGGR]	24000 h

¹⁾ With preheat ECG

Ytterligere produktdata

ZLDV_Base (standard designation) [AGGR]	G5
ZLDV_Mercury content [AGGR]	1.9 mg
ZLDV_Product remark [AGGR]	Suitable for ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C
Appropriate disposal acc. to WEEE	Ja

Egenskaper


ZLDV_Dimmable [AGGR]	Yes
ZLDV_Suitable for indoor [AGGR]	Yes

Sertifikater og standarder

ZLDV_Energy efficiency class [AGGR]	A+
ZLDV_Energy consumption [AGGR]	23 kWh/1000h

Produkt datablad


Lysfordeling

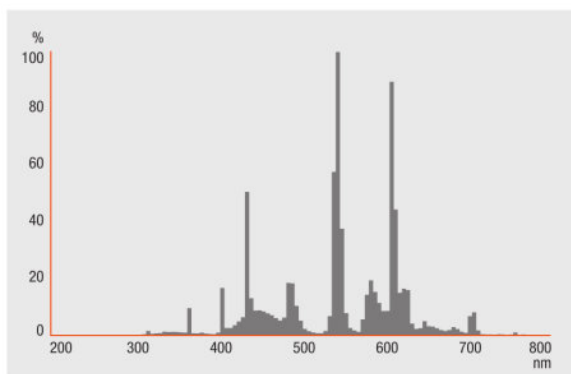

Spectral power distribution

Systemgaranti

OSRAM-system+garanti i kombinasjon med OSRAM ECG-er



Circuit diagram



Circuit diagram

Logistikk data

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
--------------	---------------------	-------------------------------	---------------------------------------	-------	-------------

Produkt datablad

4050300464701	HE 21 W/840	NO: VS 40	900 mm x 88 mm x 194 mm	15.36 dm ³	3530.00 g
4050300591407	HE 21 W/840	NO: VS 20	887 mm x 90 mm x 110 mm	8.78 dm ³	2134.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Referanser / Lenker

For mer informasjon om systemgarantien samt vilkårene og betingelsene i garantien besøk

▶ www.osram.com/system-guarantee

Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.

OSRAM GMBH is distribution partner
of LEDVANCE for Digital Lighting
Systems and Components

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HE 21 W/840

LUMILUX T5 HE | Tubular fluorescent lamps 16 mm, high efficiency, with G5 base

Produktnavn	Produktnavn ECG	EAN	Nominal wattage + Power loss	Nominell strøm	Lysstrøm ved 35 ° C	Antall belysningsutganger
HE 21 W/840	QT-ECO 1x18-21/220-240 S	4050300794907	23.00 W	0.17 A	1800 lm	1
	QT-FIT 5 1x14-35	4008321971234	23.00 W	0.11 A	1900 lm	1
	QT-FIT 5 2x14-35	4008321971258	46.00 W	0.22 A	1900 lm	2
	QTi 1x14/24/21/39 GII	4008321383334	24.00 W	0.11 A	1900 lm	1
	QTi 1x21/39 DIM	4050300870564	23.10 W	0.11 A	1900 lm	1
	QTi 1x28/54/35/49 GII	4008321383358	24.00 W	0.11 A	1900 lm	1
	QTi 1x35/49/80 GII	4008321383372	25.00 W	0.11 A	1900 lm	1
	QTi 2x14/24/21/39 GII	4008321383396	45.00 W	0.20 A	1900 lm	2
	QTi 2x21/39 DIM	4050300870694	45.00 W	0.21 A	1900 lm	2
	QTi 2x28/54/35/49 GII	4008321383419	45.00 W	0.20 A	1900 lm	2
	QTi 2x35/49/80 GII	4008321658951	49.00 W	0.23 A	2000 lm	2
	QTi DALI 1x21/39 DIM	4050300870366	23.10 W	0.11 A	1900 lm	1
	QTi DALI 2x21/39 DIM	4050300870489	45.00 W	0.21 A	1900 lm	2
	QTP5 1x14-35	4008321329035	24.00 W	0.11 A	1900 lm	1
	QTP5 2x14-35	4008321329073	45.00 W	0.20 A	1900 lm	2

Produktnavn	Produktnavn ECG	EAN	EEL – Energimerke
HE 21 W/840	QT-ECO 1x18-21/220-240 S	4050300794907	A3

Produkt datablad

Produktnavn	Produktnavn ECG	EAN	EEI – Energimerke
	QT-FIT 5 1x14-35	4008321971234	
	QT-FIT 5 2x14-35	4008321971258	
	QTi 1x14/24/21/39 GII	4008321383334	
	QTi 1x21/39 DIM	4050300870564	
	QTi 1x28/54/35/49 GII	4008321383358	
	QTi 1x35/49/80 GII	4008321383372	
	QTi 2x14/24/21/39 GII	4008321383396	
	QTi 2x21/39 DIM	4050300870694	
	QTi 2x28/54/35/49 GII	4008321383419	
	QTi 2x35/49/80 GII	4008321658951	
	QTi DALI 1x21/39 DIM	4050300870366	
	QTi DALI 2x21/39 DIM	4050300870489	
	QTP5 1x14-35	4008321329035	
	QTP5 2x14-35	4008321329073	