

---

# Produkt familie datablad

## LUMILUX T8 1 m

Tubular fluorescent lamps 26 mm, 1 m, for public transport, with G13 base

- Public transport



---

### Product features

- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Good color rendering group: 1B ( $R_a$ : 80...89)
- Dimmable
- Top-quality three-band phosphor: LUMILUX
- Available with color temperature: 2,700 K, 3,000 K, 4,000 K

---

### Areas of application

- Public transport



## Produkt familie datablad

### Teknisk data

Produkt beskrivelse	Elektriske data		Photometrical data			Mål og vekt
	ZLDV_Nominal voltage [AGGR]	ZLDV_Nominal wattage [AGGR]	ZLDV_Color rendering index Ra [AGGR]	ZLDV_Light color [AGGR]	ZLDV_Rated color temperature [AGGR]	ZLDV_Tube diameter [AGGR]
L 36 W/827-1 <sup>1)</sup>	81 V	36.00 W	≥80	827	2700 K	26 mm

Produkt beskrivelse	Temperatures & operating conditions	Levetid				
	ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	ZLDV_Service life [AGGR]	ZLDV_Lifespan [AGGR]	ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	ZLDV_Rated lamp survival factor at 6,000 h [AGGR]
L 36 W/827-1 <sup>1)</sup>	25.0 °C	18000 h	20000 h	0.99	0.99	0.99


Produkt beskrivelse	ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	ZLDV_Rated lamp survival factor at 12,000 h [AGGR]	ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	ZLDV_Operation mode LLMF/LSF [AGGR]	ZLDV_Rated lamp life time [AGGR]
L 36 W/827-1 <sup>1)</sup>	0.99	0.99	0.90	0.50	HF	20000 h

Produkt beskrivelse	Ytterligere produktdata	Egenskaper		Sertifikater og standarder	
	ZLDV_Base (standard designation) [AGGR]	ZLDV_Dimmable [AGGR]	ZLDV_Suitable for indoor [AGGR]	ZLDV_Energy consumption [AGGR]	ZLDV_Energy efficiency class [AGGR]
L 36 W/827-1 <sup>1)</sup>	G13	Yes	Yes	43 kWh/1000h	A

<sup>1)</sup> Lampen er ikke ment for almenbelysning, egnet for bruksområder som belysning av offentlig transport

## Produkt familie datablad

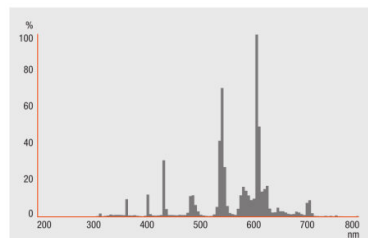

L 36 W/827-1

L 36 W/827-1

### System hjelp

For mer detaljert program informasjon og grafikk se produktets dataark.

### Logistikk data

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
4050300518114	L 36 W/827-1	NO: VS 25	727 mm x 441 mm x 145 mm	46.49 dm <sup>3</sup>	4419.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.

OSRAM GMBH is distribution partner  
of LEDVANCE for Digital Lighting  
Systems and Components

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany