

LINEARlight Rigid NICHE

Rigid LED modules for professional applications



Bruksområder

- Kupebelysning



Produkt familie datablad

Teknisk data

Elektriske data

Produkt beskrivelse	Nominell spenning	Strømtype	Konstruksjonseffekt (watt)	Spenningsområde	Accidental reverse input voltage protection up to
LR700-SD-G1 827-01 0.9W 24VDC	24,0 V	DC	0,90 W	23...25 V	25 V
LR700-SD-G1 830-01 0.9W 24VDC	24,0 V	DC	0,90 W	23...25 V	25 V
LR700-SD-G1 835-01 0.9W 24VDC	24,0 V	DC	0,90 W	23...25 V	25 V
LR700-SD-G1 840-01 0.9W 24VDC	24,0 V	DC	0,90 W	23...25 V	25 V
LR700-SD-G1 850-01 0.9W 24VDC	24,0 V	DC	0,90 W	23...25 V	25 V
LR700-SD-G1 827-03 2.7W 24VDC	24,0 V	DC	2,70 W	23...25 V	25 V
LR700-SD-G1 830-03 2.7W 24VDC	24,0 V	DC	2,70 W	23...25 V	25 V
LR700-SD-G1 835-03 2.7W 24VDC	24,0 V	DC	2,70 W	23...25 V	25 V
LR700-SD-G1 840-03 2.7W 24VDC	24,0 V	DC	2,70 W	23...25 V	25 V
LR700-SD-G1 850-03 2.7W 24VDC	24,0 V	DC	2,70 W	23...25 V	25 V
LR700-SD-G1 827-06 5.9W 24VDC	24,0 V	DC	5,90 W	23...25 V	25 V
LR700-SD-G1 830-06 5.9W 24VDC	24,0 V	DC	5,90 W	23...25 V	25 V
LR700-SD-G1 835-06 5.9W 24VDC	24,0 V	DC	5,90 W	23...25 V	25 V
LR700-SD-G1 840-06 5.9W 24VDC	24,0 V	DC	5,90 W	23...25 V	25 V
LR700-SD-G1 850-06 5.9W 24VDC	24,0 V	DC	5,90 W	23...25 V	25 V
LR700-SD-G1 827-09 8.6W 24VDC	24,0 V	DC	8,60 W	23...25 V	25 V
LR700-SD-G1 830-09 8.6W 24VDC	24,0 V	DC	8,60 W	23...25 V	25 V
LR700-SD-G1 835-09 8.6W 24VDC	24,0 V	DC	8,60 W	23...25 V	25 V
LR700-SD-G1 840-09 8.6W 24VDC	24,0 V	DC	8,60 W	23...25 V	25 V
LR700-SD-G1 850-09 8.6W 24VDC	24,0 V	DC	8,60 W	23...25 V	25 V
LR700-SD-G1 827-12 11.7W 24VDC	24,0 V	DC	11,70 W	23...25 V	25 V
LR700-SD-G1 830-12 11.7W 24VDC	24,0 V	DC	11,70 W	23...25 V	25 V
LR700-SD-G1 835-12 11.7W 24VDC	24,0 V	DC	11,70 W	23...25 V	25 V
LR700-SD-G1 840-12 11.7W 24VDC	24,0 V	DC	11,70 W	23...25 V	25 V
LR700-SD-G1 850-12 11.7W 24VDC	24,0 V	DC	11,70 W	23...25 V	25 V

Photometrical data

Produkt beskrivelse	Lysfarge LED	Fargetemperatur	Fargegjengivelsesindeks Ra	Total usefulluminous flux	Lysutbytte	Lysfarge i h.h.t. EN 12464-1
LR700-SD-G1 827-01 0.9W 24VDC	hvit	2700 K ¹⁾	>80	58 lm	63,6 lm/W	Hvit
LR700-SD-G1 830-01 0.9W 24VDC	hvit	3000 K ²⁾	>80	61 lm	66,9 lm/W	Hvit
LR700-SD-G1 835-01 0.9W 24VDC	hvit	3500 K ³⁾	>80	62 lm	68 lm/W	Hvit
LR700-SD-G1 840-01 0.9W 24VDC	hvit	4000 K ⁴⁾	>80	65 lm	71,3 lm/W	Hvit
LR700-SD-G1 850-01 0.9W 24VDC	hvit	5000 K ⁵⁾	>80	65 lm	71,3 lm/W	Hvit
LR700-SD-G1 827-03 2.7W 24VDC	hvit	2700 K ¹⁾	>80	174 lm	60,3 lm/W	Hvit
LR700-SD-G1 830-03 2.7W 24VDC	hvit	3000 K ²⁾	>80	180 lm	65,8 lm/W	Hvit

Produkt familie datablad

Produkt beskrivelse	Lysfarge LED	Fargetemperatur	Fargegjen- givelsesin- deks Ra	Total useful luminous flux	Lysutbytte	Lysfarge i h.h.t. EN 12464-1
LR700-SD-G1 835-03 2.7W 24VDC	hvit	3500 K ³⁾	>80	180 lm	65,8 lm/W	Hvit
LR700-SD-G1 840-03 2.7W 24VDC	hvit	4000 K ⁴⁾	>80	202 lm	73,8 lm/W	Hvit
LR700-SD-G1 850-03 2.7W 24VDC	hvit	5000 K ⁵⁾	>80	202 lm	73,8 lm/W	Hvit
LR700-SD-G1 827-06 5.9W 24VDC	hvit	2700 K ¹⁾	>80	396 lm	66,5 lm/W	Hvit
LR700-SD-G1 830-06 5.9W 24VDC	hvit	3000 K ²⁾	>80	412 lm	69,2 lm/W	Hvit
LR700-SD-G1 835-06 5.9W 24VDC	hvit	3500 K ³⁾	>80	412 lm	69,2 lm/W	Hvit
LR700-SD-G1 840-06 5.9W 24VDC	hvit	4000 K ⁴⁾	>80	436 lm	73,3 lm/W	Hvit
LR700-SD-G1 850-06 5.9W 24VDC	hvit	5000 K ⁵⁾	>80	463 lm	73,3 lm/W	Hvit
LR700-SD-G1 827-09 8.6W 24VDC	hvit	2700 K ¹⁾	>80	595 lm	68,9 lm/W	Hvit
LR700-SD-G1 830-09 8.6W 24VDC	hvit	3000 K ²⁾	>80	605 lm	70 lm/W	Hvit
LR700-SD-G1 835-09 8.6W 24VDC	hvit	3500 K ³⁾	>80	605 lm	70 lm/W	Hvit
LR700-SD-G1 840-09 8.6W 24VDC	hvit	4000 K ⁴⁾	>80	663 lm	76,7 lm/W	Hvit
LR700-SD-G1 850-09 8.6W 24VDC	hvit	5000 K ⁵⁾	>80	663 lm	76,7 lm/W	Hvit
LR700-SD-G1 827-12 11.7W 24VDC	hvit	2700 K ¹⁾	>80	813 lm	68,4 lm/W	Hvit
LR700-SD-G1 830-12 11.7W 24VDC	hvit	3000 K ²⁾	>80	848 lm	71,4 lm/W	Hvit
LR700-SD-G1 835-12 11.7W 24VDC	hvit	3500 K ³⁾	>80	848 lm	71,4 lm/W	Hvit
LR700-SD-G1 840-12 11.7W 24VDC	hvit	4000 K ⁴⁾	>80	902 lm	75,9 lm/W	Hvit
LR700-SD-G1 850-12 11.7W 24VDC	hvit	5000 K ⁵⁾	>80	902 lm	75,9 lm/W	Hvit

¹⁾ Emitted CCT 2500K

²⁾ Emitted CCT 2800K

³⁾ Emitted CCT 3100K

⁴⁾ Emitted CCT 3600K

⁵⁾ Emitted CCT 4500K

Lystekniske data

Produkt beskrivelse	Rated beam angle (half peak value)	Starttid	Oppvarming stid (60 %)
LR700-SD-G1 827-01 0.9W 24VDC	123,00 °	< 0,5 s	120,00 s
LR700-SD-G1 830-01 0.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 835-01 0.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 840-01 0.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 850-01 0.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 827-03 2.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 830-03 2.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 835-03 2.7W 24VDC		< 0,5 s	< 0,50 s
LR700-SD-G1 840-03 2.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 850-03 2.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 827-06 5.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 830-06 5.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 835-06 5.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s

Produkt familie datablad

Produkt beskrivelse	Rated beam angle (half peak value)	Starttid	Oppvarming stid (60 %)
LR700-SD-G1 840-06 5.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 850-06 5.9W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 827-09 8.6W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 830-09 8.6W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 835-09 8.6W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 840-09 8.6W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 850-09 8.6W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 827-12 11.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 830-12 11.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 835-12 11.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 840-12 11.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s
LR700-SD-G1 850-12 11.7W 24VDC	123,00 °	< 0,5 s	< 0,50 s

LED module information


Produkt beskrivelse	Antall LED per modul
LR700-SD-G1 827-01 0.9W 24VDC	14
LR700-SD-G1 830-01 0.9W 24VDC	14
LR700-SD-G1 835-01 0.9W 24VDC	14
LR700-SD-G1 840-01 0.9W 24VDC	14
LR700-SD-G1 850-01 0.9W 24VDC	14
LR700-SD-G1 827-03 2.7W 24VDC	42
LR700-SD-G1 830-03 2.7W 24VDC	42
LR700-SD-G1 835-03 2.7W 24VDC	42
LR700-SD-G1 840-03 2.7W 24VDC	42
LR700-SD-G1 850-03 2.7W 24VDC	42
LR700-SD-G1 827-06 5.9W 24VDC	91
LR700-SD-G1 830-06 5.9W 24VDC	91
LR700-SD-G1 835-06 5.9W 24VDC	91
LR700-SD-G1 840-06 5.9W 24VDC	91
LR700-SD-G1 850-06 5.9W 24VDC	91
LR700-SD-G1 827-09 8.6W 24VDC	133
LR700-SD-G1 830-09 8.6W 24VDC	133
LR700-SD-G1 835-09 8.6W 24VDC	133
LR700-SD-G1 840-09 8.6W 24VDC	133
LR700-SD-G1 850-09 8.6W 24VDC	133
LR700-SD-G1 827-12 11.7W 24VDC	182
LR700-SD-G1 830-12 11.7W 24VDC	182
LR700-SD-G1 835-12 11.7W 24VDC	182
LR700-SD-G1 840-12 11.7W 24VDC	182
LR700-SD-G1 850-12 11.7W 24VDC	182

Produkt familie datablad


Mål og vekt

Produkt beskrivelse	Lengde	Produktvekt
LR700-SD-G1 827-01 0.9W 24VDC	102,0 mm	9,90 g
LR700-SD-G1 830-01 0.9W 24VDC	102,0 mm	9,90 g
LR700-SD-G1 835-01 0.9W 24VDC	102,0 mm	9,90 g
LR700-SD-G1 840-01 0.9W 24VDC	102,0 mm	9,90 g
LR700-SD-G1 850-01 0.9W 24VDC	102,0 mm	9,90 g
LR700-SD-G1 827-03 2.7W 24VDC	285,0 mm	23,80 g
LR700-SD-G1 830-03 2.7W 24VDC	285,0 mm	23,80 g
LR700-SD-G1 835-03 2.7W 24VDC	284,0 mm	23,80 g
LR700-SD-G1 840-03 2.7W 24VDC	285,0 mm	23,80 g
LR700-SD-G1 850-03 2.7W 24VDC	284,0 mm	23,80 g
LR700-SD-G1 827-06 5.9W 24VDC	603,0 mm	44,80 g
LR700-SD-G1 830-06 5.9W 24VDC	603,0 mm	44,80 g
LR700-SD-G1 835-06 5.9W 24VDC	603,0 mm	44,80 g
LR700-SD-G1 840-06 5.9W 24VDC	603,0 mm	44,80 g
LR700-SD-G1 850-06 5.9W 24VDC	603,0 mm	44,80 g
LR700-SD-G1 827-09 8.6W 24VDC	876,0 mm	61,50 g
LR700-SD-G1 830-09 8.6W 24VDC	876,0 mm	61,50 g
LR700-SD-G1 835-09 8.6W 24VDC	876,0 mm	61,50 g
LR700-SD-G1 840-09 8.6W 24VDC	876,0 mm	61,50 g
LR700-SD-G1 850-09 8.6W 24VDC	876,0 mm	61,50 g
LR700-SD-G1 827-12 11.7W 24VDC	1195 mm	89,20 g
LR700-SD-G1 830-12 11.7W 24VDC	1195 mm	89,20 g
LR700-SD-G1 835-12 11.7W 24VDC	1194 mm	89,20 g
LR700-SD-G1 840-12 11.7W 24VDC	1195 mm	89,20 g
LR700-SD-G1 850-12 11.7W 24VDC	1194 mm	89,20 g


Produktstrektegning med tall

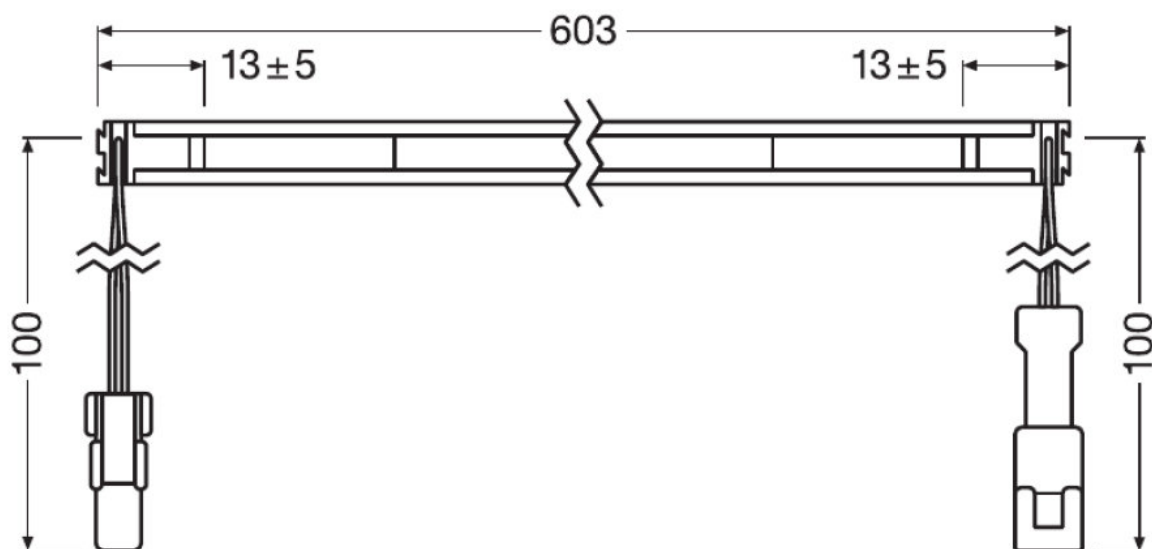

LR700-SD-G1 827-06 5.9W 24VDC, LR700-SD-G1 830-06 5.9W 24VDC, LR700-SD-G1 835-06 5.9W 24VDC, LR700-SD-G1 840-06 5.9W 24VDC, LR700-SD-G1 850-06 5.9W 24VDC

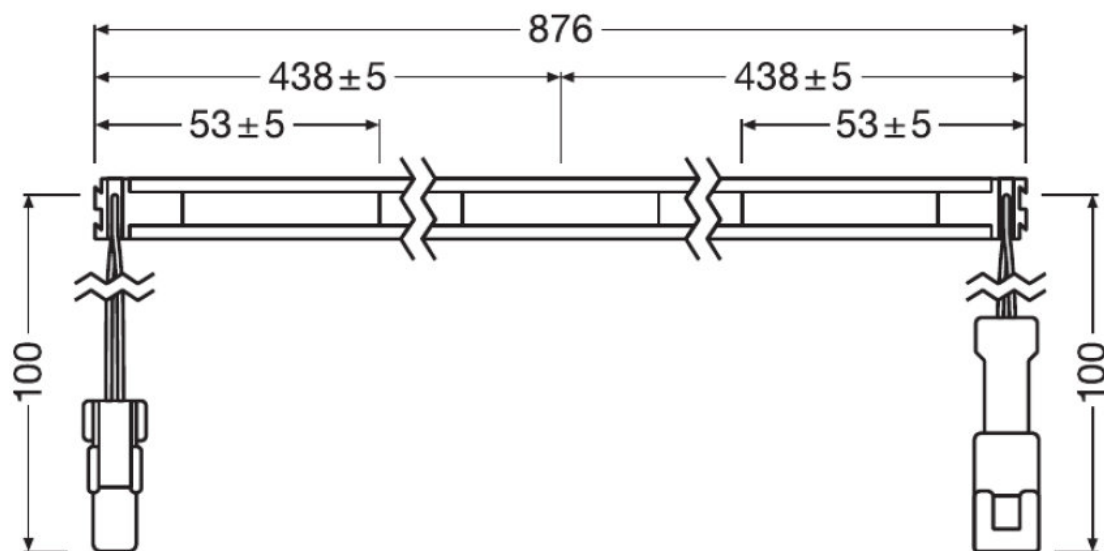

LR700-SD-G1 827-09 8.6W 24VDC, LR700-SD-G1 830-09 8.6W 24VDC, LR700-SD-G1 835-09 8.6W 24VDC, LR700-SD-G1 840-09 8.6W 24VDC, LR700-SD-G1 850-09 8.6W 24VDC

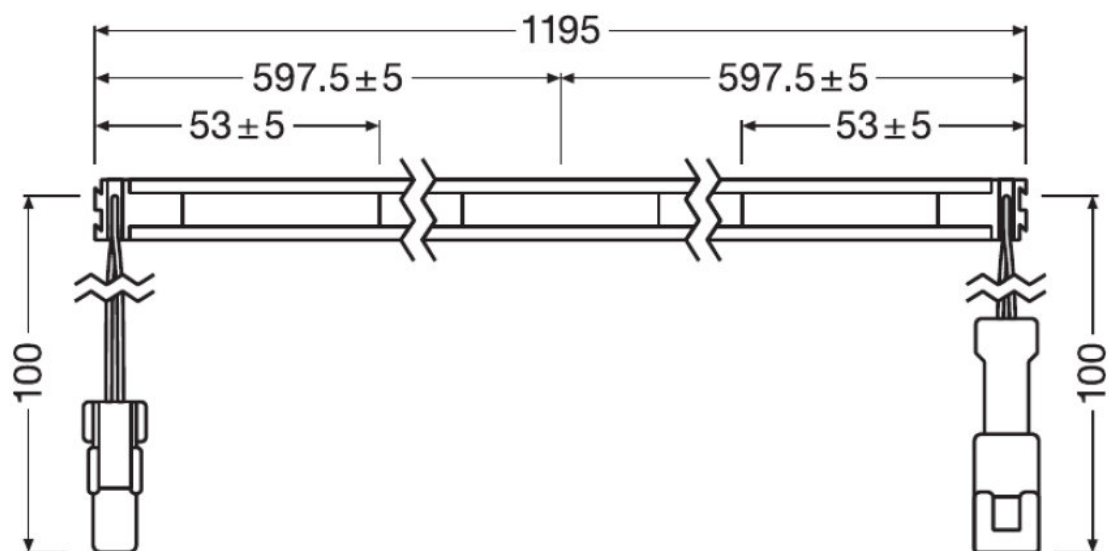

LR700-SD-G1 827-12 11.7W 24VDC, LR700-SD-G1 830-12 11.7W 24VDC, LR700-SD-G1 835-12 11.7W 24VDC, LR700-SD-G1 840-12 11.7W 24VDC, LR700-SD-G1 850-12 11.7W 24VDC

Farger og materialer

Produkt beskrivelse	Kapslingsmateriale	Materiale
LR700-SD-G1 827-01 0.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 830-01 0.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 835-01 0.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 840-01 0.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 850-01 0.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 827-03 2.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 830-03 2.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 835-03 2.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 840-03 2.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 850-03 2.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 827-06 5.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 830-06 5.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 835-06 5.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 840-06 5.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 850-06 5.9W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 827-09 8.6W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 830-09 8.6W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 835-09 8.6W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 840-09 8.6W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 850-09 8.6W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 827-12 11.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 830-12 11.7W 24VDC	Polycarbonate (PC)	Aluminum

Produkt familie datablad

Produkt beskrivelse	Kapslingsmateriale	Materiale
LR700-SD-G1 835-12 11.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 840-12 11.7W 24VDC	Polycarbonate (PC)	Aluminum
LR700-SD-G1 850-12 11.7W 24VDC	Polycarbonate (PC)	Aluminum

Temperatures & operating conditions

Produkt beskrivelse	Maksimum temperatur v/ tc testpunkt	Temperaturo mråde ved lagring	Temperaturo mråde i drift
LR700-SD-G1 827-01 0.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 830-01 0.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 835-01 0.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 840-01 0.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 850-01 0.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 827-03 2.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 830-03 2.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 835-03 2.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 840-03 2.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 850-03 2.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 827-06 5.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 830-06 5.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 835-06 5.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 840-06 5.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 850-06 5.9W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 827-09 8.6W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 830-09 8.6W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 835-09 8.6W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 840-09 8.6W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 850-09 8.6W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 827-12 11.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 830-12 11.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 835-12 11.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 840-12 11.7W 24VDC	70 °C	-20...65 °C	-20...70 °C
LR700-SD-G1 850-12 11.7W 24VDC	70 °C	-20...65 °C	-20...70 °C

Egenskaper

Produkt beskrivelse	Dimbar
LR700-SD-G1 827-01 0.9W 24VDC	Ja ¹⁾
LR700-SD-G1 830-01 0.9W 24VDC	Ja ¹⁾
LR700-SD-G1 835-01 0.9W 24VDC	Ja ¹⁾
LR700-SD-G1 840-01 0.9W 24VDC	Ja ¹⁾
LR700-SD-G1 850-01 0.9W 24VDC	Ja ¹⁾
LR700-SD-G1 827-03 2.7W 24VDC	Ja ¹⁾
LR700-SD-G1 830-03 2.7W 24VDC	Ja ¹⁾
LR700-SD-G1 835-03 2.7W 24VDC	Ja ¹⁾
LR700-SD-G1 840-03 2.7W 24VDC	Ja ¹⁾

Produkt familie datablad

Produkt beskrivelse	Dimbar
LR700-SD-G1 850-03 2.7W 24VDC	Ja ¹⁾
LR700-SD-G1 827-06 5.9W 24VDC	Ja ¹⁾
LR700-SD-G1 830-06 5.9W 24VDC	Ja ¹⁾
LR700-SD-G1 835-06 5.9W 24VDC	Ja ¹⁾
LR700-SD-G1 840-06 5.9W 24VDC	Ja ¹⁾
LR700-SD-G1 850-06 5.9W 24VDC	Ja ¹⁾
LR700-SD-G1 827-09 8.6W 24VDC	Ja ¹⁾
LR700-SD-G1 830-09 8.6W 24VDC	Ja ¹⁾
LR700-SD-G1 835-09 8.6W 24VDC	Ja ¹⁾
LR700-SD-G1 840-09 8.6W 24VDC	Ja ¹⁾
LR700-SD-G1 850-09 8.6W 24VDC	Ja ¹⁾
LR700-SD-G1 827-12 11.7W 24VDC	Ja ¹⁾
LR700-SD-G1 830-12 11.7W 24VDC	Ja ¹⁾
LR700-SD-G1 835-12 11.7W 24VDC	Ja ¹⁾
LR700-SD-G1 840-12 11.7W 24VDC	Ja ¹⁾
LR700-SD-G1 850-12 11.7W 24VDC	Ja ¹⁾

¹⁾ Recommended minimum 5%

Sertifikater og standarder

Produkt beskrivelse	Standarder
LR700-SD-G1 827-01 0.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 830-01 0.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 835-01 0.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 840-01 0.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 850-01 0.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 827-03 2.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 830-03 2.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 835-03 2.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 840-03 2.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE

Produkt familie datablad

Produkt beskrivelse	Standarder
LR700-SD-G1 850-03 2.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 827-06 5.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 830-06 5.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 835-06 5.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 840-06 5.9W 24VDC	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 850-06 5.9W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 827-09 8.6W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 830-09 8.6W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 835-09 8.6W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 840-09 8.6W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 850-09 8.6W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 827-12 11.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 830-12 11.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 835-12 11.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 840-12 11.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE
LR700-SD-G1 850-12 11.7W 24VDC	Acc. to IEC 62471/Acc. to EN 60529/Acc. to IEC 60598-1 (clause 15)/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547/CE

Logistiske data

Produkt beskrivelse	Commodity code
LR700-SD-G1 827-01 0.9W 24VDC	940540399000

Produkt familie datablad

Produkt beskrivelse	Commodity code
LR700-SD-G1 830-01 0.9W 24VDC	940540399000
LR700-SD-G1 835-01 0.9W 24VDC	940540399000
LR700-SD-G1 840-01 0.9W 24VDC	940540399000
LR700-SD-G1 850-01 0.9W 24VDC	940540399000
LR700-SD-G1 827-03 2.7W 24VDC	940540399000
LR700-SD-G1 830-03 2.7W 24VDC	940540399000
LR700-SD-G1 835-03 2.7W 24VDC	940540399000
LR700-SD-G1 840-03 2.7W 24VDC	940540399000
LR700-SD-G1 850-03 2.7W 24VDC	940540399000
LR700-SD-G1 827-06 5.9W 24VDC	940540399000
LR700-SD-G1 830-06 5.9W 24VDC	940540399000
LR700-SD-G1 835-06 5.9W 24VDC	940540399000
LR700-SD-G1 840-06 5.9W 24VDC	940540399000
LR700-SD-G1 850-06 5.9W 24VDC	940540399000
LR700-SD-G1 827-09 8.6W 24VDC	940540399000
LR700-SD-G1 830-09 8.6W 24VDC	940540399000
LR700-SD-G1 835-09 8.6W 24VDC	940540399000
LR700-SD-G1 840-09 8.6W 24VDC	940540399000
LR700-SD-G1 850-09 8.6W 24VDC	940540399000
LR700-SD-G1 827-12 11.7W 24VDC	940540399000
LR700-SD-G1 830-12 11.7W 24VDC	940540399000
LR700-SD-G1 835-12 11.7W 24VDC	940540399000
LR700-SD-G1 840-12 11.7W 24VDC	940540399000
LR700-SD-G1 850-12 11.7W 24VDC	940540399000




System hjelp

For mer detaljert program informasjon og grafikk se produktets dataark.
























Salg og teknisk støtte

Salg og teknisk støtte www.osram.com








Last ned data

Fil	
	User instruction LINEARlight Rigid NICHE
	Product Datasheet LINEARlight Rigid NICHE specification sheet
	Declarations of conformity Declaration of conformity LR700SD-G1

Produkt familie datablad

	CAD data LR700SD-G1-xxx-01
	Eulmdat Eulmdat LR700SD-G1-827-01
	Eulmdat Eulmdat LR700SD-G1-830-01
	Eulmdat Eulmdat LR700SD-G1-835-01
	Eulmdat Eulmdat LR700SD-G1-840-01
	Eulmdat Eulmdat LR700SD-G1-850-01
	CAD data LR700SD-G1-xxx-03
	Eulmdat Eulmdat LR700SD-G1-827-03
	Eulmdat Eulmdat LR700SD-G1-830-03
	Eulmdat Eulmdat LR700SD-G1-835-03
	Eulmdat Eulmdat LR700SD-G1-840-03
	Eulmdat Eulmdat LR700SD-G1-850-03
	CAD data LR700SD-G1-xxx-06
	Eulmdat Eulmdat LR700SD-G1-827-06
	Eulmdat Eulmdat LR700SD-G1-830-06
	Eulmdat Eulmdat LR700SD-G1-835-06
	Eulmdat Eulmdat LR700SD-G1-840-06
	Eulmdat Eulmdat LR700SD-G1-850-06
	CAD data LR700SD-G1-xxx-09
	Eulmdat Eulmdat LR700SD-G1-827-09
	Eulmdat Eulmdat LR700SD-G1-830-09
	Eulmdat Eulmdat LR700SD-G1-835-09
	Eulmdat Eulmdat LR700SD-G1-840-09

Produkt familie datablad

	Eulumdat Eulumdat LR700SD-G1-850-09
	CAD data LR700SD-G1-xxx-12
	Eulumdat Eulumdat LR700SD-G1-827-12
	Eulumdat Eulumdat LR700SD-G1-830-12
	Eulumdat Eulumdat LR700SD-G1-835-12
	Eulumdat Eulumdat LR700SD-G1-840-12
	Eulumdat Eulumdat LR700SD-G1-850-12

Logistikk data

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
4052899557314	LR700-SD-G1 827-01 0.9W 24VDC	NO: VS 200	320 mm x 200 mm x 140 mm	8.96 dm ³	4292.00 g
4052899557338	LR700-SD-G1 830-01 0.9W 24VDC	NO: VS 200	320 mm x 200 mm x 140 mm	8.96 dm ³	4292.00 g
4062172021418	LR700-SD-G1 835-01 0.9W 24VDC	NO: VS 200	320 mm x 200 mm x 140 mm	8.96 dm ³	4292.00 g
4052899557352	LR700-SD-G1 840-01 0.9W 24VDC	NO: VS 200	320 mm x 200 mm x 140 mm	8.96 dm ³	4292.00 g
4062172021432	LR700-SD-G1 850-01 0.9W 24VDC	NO: VS 200	320 mm x 200 mm x 140 mm	8.96 dm ³	4292.00 g
4052899557451	LR700-SD-G1 827-03 2.7W 24VDC	NO: VS 100	360 mm x 200 mm x 140 mm	10.08 dm ³	4915.00 g
4052899557475	LR700-SD-G1 830-03 2.7W 24VDC	NO: VS 100	360 mm x 200 mm x 140 mm	10.08 dm ³	4915.00 g
4062172021456	LR700-SD-G1 835-03 2.7W 24VDC	NO: VS 100	320 mm x 200 mm x 140 mm	8.96 dm ³	4915.00 g
4052899557499	LR700-SD-G1 840-03 2.7W 24VDC	NO: VS 100	360 mm x 200 mm x 140 mm	10.08 dm ³	4915.00 g
4062172021487	LR700-SD-G1 850-03 2.7W 24VDC	NO: VS 100	320 mm x 200 mm x 140 mm	8.96 dm ³	4915.00 g
4052899557536	LR700-SD-G1 827-06 5.9W 24VDC	NO: VS 100	660 mm x 200 mm x 140 mm	18.48 dm ³	9191.00 g
4052899557550	LR700-SD-G1 830-06 5.9W 24VDC	NO: VS 100	660 mm x 200 mm x 140 mm	18.48 dm ³	9191.00 g
4062172021500	LR700-SD-G1 835-06 5.9W 24VDC	NO: VS 100	660 mm x 200 mm x 140 mm	18.48 dm ³	9191.00 g

Produkt familie datablad

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
4052899557574	LR700-SD-G1 840-06 5.9W 24VDC	NO: VS 100	660 mm x 200 mm x 140 mm	18.48 dm ³	9191.00 g
4062172021524	LR700-SD-G1 850-06 5.9W 24VDC	NO: VS 100	660 mm x 200 mm x 140 mm	18.48 dm ³	9191.00 g
4052899557611	LR700-SD-G1 827-09 8.6W 24VDC	NO: VS 100	940 mm x 200 mm x 140 mm	26.32 dm ³	12926.00 g
4052899557635	LR700-SD-G1 830-09 8.6W 24VDC	NO: VS 100	940 mm x 200 mm x 140 mm	26.32 dm ³	12926.00 g
4062172021548	LR700-SD-G1 835-09 8.6W 24VDC	NO: VS 100	940 mm x 200 mm x 140 mm	26.32 dm ³	12926.00 g
4052899557659	LR700-SD-G1 840-09 8.6W 24VDC	NO: VS 100	940 mm x 200 mm x 140 mm	26.32 dm ³	12926.00 g
4062172021562	LR700-SD-G1 850-09 8.6W 24VDC	NO: VS 100	940 mm x 200 mm x 140 mm	26.32 dm ³	12926.00 g
4052899557697	LR700-SD-G1 827-12 11.7W 24VDC	NO: VS 100	1260 mm x 200 mm x 140 mm	35.28 dm ³	17983.00 g
4052899557710	LR700-SD-G1 830-12 11.7W 24VDC	NO: VS 100	1260 mm x 200 mm x 140 mm	35.28 dm ³	17983.00 g
4062172021586	LR700-SD-G1 835-12 11.7W 24VDC	NO: VS 100	1260 mm x 200 mm x 140 mm	35.28 dm ³	17983.00 g
4052899557734	LR700-SD-G1 840-12 11.7W 24VDC	NO: VS 100	1260 mm x 200 mm x 140 mm	35.28 dm ³	17983.00 g
4062172021609	LR700-SD-G1 850-12 11.7W 24VDC	NO: VS 100	1260 mm x 200 mm x 140 mm	35.28 dm ³	17983.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Valgfritt tilbehør

Produkt beskrivelse	Navn på tilbehør	Kode på tilbehør
LR700-SD-G1 827-01 0.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	4062172027229
LR700-SD-G1 827-01 0.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	4062172027243
LR700-SD-G1 827-01 0.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	4062172027267
LR700-SD-G1 827-01 0.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	4062172027281
LR700-SD-G1 827-01 0.9W 24VDC	LR700-SD-G1 -CLIP	4062172026918
LR700-SD-G1 830-01 0.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	4062172027229

Produkt familie datablad

LR700-SD-G1 830-01 0.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 830-01 0.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 830-01 0.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 830-01 0.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 835-01 0.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 835-01 0.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 835-01 0.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 835-01 0.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 835-01 0.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 840-01 0.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 840-01 0.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 840-01 0.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 840-01 0.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 840-01 0.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 850-01 0.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 850-01 0.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 850-01 0.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 850-01 0.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 850-01 0.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 827-03 2.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 827-03 2.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 827-03 2.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 827-03 2.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281

Produkt familie datablad

LR700-SD-G1 827-03 2.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 830-03 2.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 830-03 2.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 830-03 2.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 830-03 2.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 830-03 2.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 835-03 2.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 835-03 2.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 835-03 2.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 835-03 2.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 835-03 2.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 840-03 2.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 840-03 2.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 840-03 2.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 840-03 2.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 840-03 2.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 850-03 2.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 850-03 2.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 850-03 2.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 850-03 2.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 850-03 2.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 827-06 5.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 827-06 5.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243

Produkt familie datablad

LR700-SD-G1 827-06 5.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 827-06 5.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 827-06 5.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 830-06 5.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 830-06 5.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 830-06 5.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 830-06 5.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 830-06 5.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 835-06 5.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 835-06 5.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 835-06 5.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 835-06 5.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 835-06 5.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 840-06 5.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 840-06 5.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 840-06 5.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 840-06 5.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 840-06 5.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 850-06 5.9W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 850-06 5.9W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 850-06 5.9W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 850-06 5.9W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 850-06 5.9W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918

Produkt familie datablad

LR700-SD-G1 827-09 8.6W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 827-09 8.6W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 827-09 8.6W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 827-09 8.6W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 827-09 8.6W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 830-09 8.6W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 830-09 8.6W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 830-09 8.6W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 830-09 8.6W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 830-09 8.6W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 835-09 8.6W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 835-09 8.6W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 835-09 8.6W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 835-09 8.6W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 835-09 8.6W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 840-09 8.6W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 840-09 8.6W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 840-09 8.6W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 840-09 8.6W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 840-09 8.6W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 850-09 8.6W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 850-09 8.6W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 850-09 8.6W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267

Produkt familie datablad

LR700-SD-G1 850-09 8.6W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 850-09 8.6W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 827-12 11.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 827-12 11.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 827-12 11.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 827-12 11.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 827-12 11.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 830-12 11.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 830-12 11.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 830-12 11.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 830-12 11.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 830-12 11.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 835-12 11.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 835-12 11.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 835-12 11.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 835-12 11.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 835-12 11.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 840-12 11.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229
LR700-SD-G1 840-12 11.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 840-12 11.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 840-12 11.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 840-12 11.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918
LR700-SD-G1 850-12 11.7W 24VDC	LR700-SD-G1 -POWER CABLE 3000	▶	4062172027229

Produkt familie datablad

LR700-SD-G1 850-12 11.7W 24VDC	LR700-SD-G1 -JUMPER CABLE 0300	▶	4062172027243
LR700-SD-G1 850-12 11.7W 24VDC	LR700-SD-G1 -PLATE FOR MAGNET	▶	4062172027267
LR700-SD-G1 850-12 11.7W 24VDC	LR700-SD-G1 -CONNECTORS HOLDER	▶	4062172027281
LR700-SD-G1 850-12 11.7W 24VDC	LR700-SD-G1 -CLIP	▶	4062172026918

Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.