

# Produkt datablad

## L 58 W/830

LUMILUX T8 | Lysrør 26 mm, med G13 sokkel



- Public buildings
- Office lighting
- Industry
- Shops
- Supermarkets and department stores
- Street lighting
- Outdoor applications only in suitable luminaires

- Proven lamp technology
- Good economy thanks to high efficiency
- Available in many different light colors (2,700...8,000 K) for various applications

### Product features

- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Good color rendering group: 1B ( $R_a$ : 80...89)
- Dimmable
- Top-quality three-band phosphor: LUMILUX

### Product benefits

- Proven lamp technology
- Good economy thanks to high efficiency
- Available in many different light colors (2,700...8,000 K) for various applications



## Produkt datablad

---

### Areas of application

- Public buildings
- Office lighting
- Industry
- Shops
- Supermarkets and department stores
- Street lighting
- Outdoor applications only in suitable luminaires

## Produkt datablad

### Teknisk data


#### Elektriske data

ZLDV_Nominal wattage [AGGR]	58.00 W
ZLDV_Rated lamp efficacy (HF data 25 °C) [AGGR]	Under clarification by authority and standardization body
ZLDV_Rated wattage [AGGR]	58.00 W

#### Photometrical data

ZLDV_Rated lamp efficacy (standard condition) [AGGR]	90 lm/W
ZLDV_Color rendering index Ra [AGGR]	≥80
ZLDV_Rated luminous flux [AGGR]	5200 lm
ZLDV_Luminous flux at 25 °C [AGGR]	5200 lm
ZLDV_Light color [AGGR]	830
ZLDV_Rated color temperature [AGGR]	3000 K
ZLDV_Nominal luminous flux [AGGR]	5200 lm
ZLDV_Light color (designation) [AGGR]	LUMILUX Warm White
ZLDV_Rated LLMF at 2,000 h [AGGR]	0.96
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.94
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.93
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 16,000 h [AGGR]	0.90
ZLDV_Rated LLMF at 20,000 h [AGGR]	0.89

#### Mål og vekt

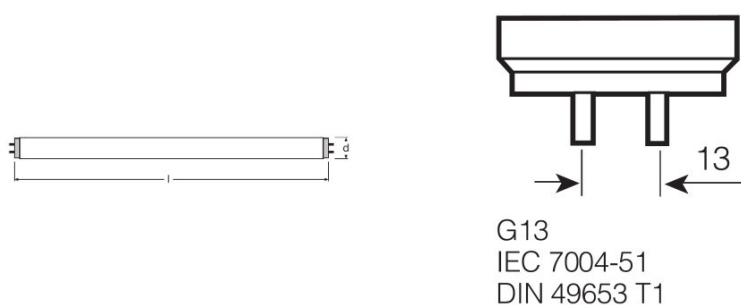

ZLDV_Tube diameter [AGGR]	26 mm
ZLDV_Length [AGGR]	1500 mm

## Produkt datablad

ZLDV_Length with base excl. base pins/connection [AGGR]	1500.00 mm
ZLDV_Diameter [AGGR]	26.0 mm
ZLDV_Maximum diameter [AGGR]	26.0 mm

### Temperatures & operating conditions

ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	25.0 °C
--	---------

### Levetid

ZLDV_Service life [AGGR]	18000 h <sup>1)</sup>
ZLDV_Lifespan [AGGR]	20000 h <sup>1)</sup>
ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 6,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 12,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	0.50
ZLDV_Operation mode LLMF/LSF [AGGR]	HF
ZLDV_Rated lamp life time [AGGR]	20000 h

<sup>1)</sup> With preheat ECG

### Ytterligere produktdata

ZLDV_Base (standard designation) [AGGR]	G13
ZLDV_Mercury content [AGGR]	2.5 mg
Appropriate disposal acc. to WEEE	Ja

### Egenskaper

ZLDV_Dimmable [AGGR]	Yes
ZLDV_Suitable for indoor [AGGR]	Yes


### Sertifikater og standarder

ZLDV_Energy efficiency class [AGGR]	A
ZLDV_Energy consumption [AGGR]	68 kWh/1000h

## Produkt datablad

### Lysfordeling

---

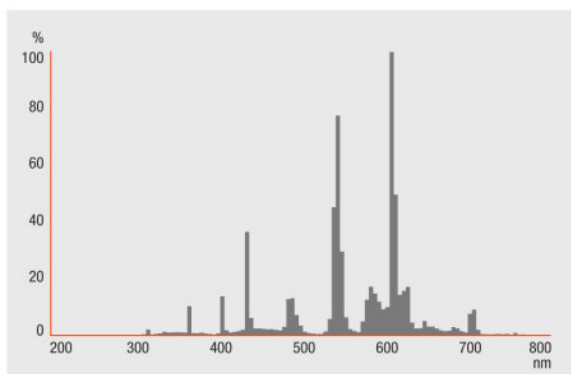


---

Spectral power distribution

---

### Systemgaranti

OSRAM-system+garanti i kombinasjon med OSRAM ECG-er



---

Circuit diagram

---

### Logistikk data

Product kode	Produkt beskrivelse	Forpakkings enhet (stk/enhet)	Dimensjoner (lengde x bredde x høyde)	Volum	Brutto vekt
--------------	---------------------	-------------------------------	---------------------------------------	-------	-------------

## Produkt datablad

4050300470382	L 58 W/830	NO: VS 30	1295 mm x 456 mm x 206 mm	121.65 dm <sup>3</sup>	7243.00 g
4050300517971	L 58 W/830	NO: VS 25	142 mm x 145 mm x 1542 mm	31.75 dm <sup>3</sup>	6520.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Referanser / Lenker

For mer informasjon om systemgarantien samt vilkårene og betingelsene i garantien besøk

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

For mer informasjon om QUICKTRONIC elektronisk forkobling gå til

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

### Ansvarsfraskrivelse

Endres uten varsel. Sørg alltid for å bruke den nyeste versjonen.

OSRAM GMBH is distribution partner  
of LEDVANCE for Digital Lighting  
Systems and Components

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany

## L 58 W/830

LUMILUX T8 | Lysrør 26 mm, med G13 sokkel

Produktnavn	Produktnavn ECG	EAN	Nominal wattage + Power loss	Nominell strøm	Lysstrøm ved 35 ° C	Antall belysningsutganger
L 58 W/830	QT 1x58 DIM	4008321645609	55.70 W	0.25 A	5000 lm	1
	QT 2x58 DIM	4008321645814	110.00 W	0.48 A	5000 lm	2
	QT-FIT 5/8 1x54-58	4008321873828	54.00 W	0.24 A	5000 lm	1
	QT-FIT 5/8 2x54-58	4008321873842	107.00 W	0.48 A	5000 lm	2
	QT-FIT8 1x58-70	4008321294227	54.00 W	0.24 A	5000 lm	1
	QT-FIT8 2x58	4008321294289				
	QT-FIT8 2x58-70	4052899151932	109.00 W	0.48 A	5000 lm	2
	QTi 1x28/54/35/49 GII	4008321383358	55.00 W	0.24 A	5000 lm	1
	QTi 2x28/54/35/49 GII	4008321383419	109.00 W	0.47 A	5000 lm	2
	QTi DALI 1x58 DIM	4050300870823	56.00 W	0.25 A	5000 lm	1
	QTi DALI 2x58 DIM	4050300870847	108.00 W	0.47 A	5000 lm	2
	QTP-OPTIMAL 1x54-58	4008321873729	54.00 W	0.25 A	5000 lm	1
	QTP-OPTIMAL 2x54-58	4008321880253	112.00 W	0.49 A	5000 lm	2